


# Technical Specifications



| Product                  | Solid Stringer  |
|--------------------------|---|
| <b>Description:</b>      | Stringer all made of hardwood.<br>Four (4) to five (5) hardwood staves edge glued under pressure.<br>Number of finger-joints depends on species and lengths. Product made in Beauceville, QC Canada.  |
| <b>Finger-Joint</b>      | <b>Exterior staves:</b> No finger-joint in red oak and maple 6' to 9' long and in yellow birch 6' to 8' long.<br>One (1) finger-joint in red oak and maple 10' to 12' long and in yellow birch 9' to 12' long. Possibility of one (1) to two (2) finger-joints in maple, red oak and yellow birch 14' to 16' long.<br><b>Interior staves:</b> One finger-joint in red oak and maple 6' to 9' long and in yellow birch 6' to 8' long. Two (2) finger-joints in red oak and maple 10' to 12' long and in yellow birch 9' to 12' long. Possibility of two (2) to three (3) finger-joints in maple, red oak and yellow birch 14' to 16' long. |
| <b>Thickness:</b>        | 1 1/16", 1 3/16"  |
| <b>Width:</b>            | 9 1/2", 11 1/2"   |
| <b>Length:</b>           | <b>Red oak and maple:</b> 10' to 16'<br><b>Yellow birch:</b> 9' to 16'<br>Fixed lengths are available. Extra fees may apply.  |
| <b>Species:</b>          | Red oak (Northern red oak), maple (hard maple), yellow birch  |
| <b>Grades:</b>           | <b>Natural:</b> Available in red oak, maple and yellow birch.<br><b>Select:</b> Available in red oak and maple.<br><b>Sap:</b> Available in yellow birch.   |
| <b>Finish:</b>           | Good on three faces, sanded with #80 and/or #120 grit.  |
| <b>Tolerances:</b>       | Thickness: $\pm 0,015''$ → 5% of volume might be 1 5/32" in 1 3/16" thick.<br>Width: $\pm 0,015''$<br>Length: n/a   |
| <b>Use Requirements:</b> | Humidity must be kept between 30% and 60% at all times.   |
| <b>Minimum Quantity:</b> | 250' per order<br>Cutback: up to 5% cutback of 6' and up.   |
| <b>Packaging</b>         |   |
| <b>Pallet content:</b>   | 256'/pallet<br>Four (4) pieces wide installed stacked on two (2) pallets of 24" long x 48 wide".<br>Maximum height (pallet included): $\pm 66''$<br>Pallet size: Two (2) bloc pallets of 24" wide x 48" long (spaced from each other)<br>Total pounds per pallet: $\pm 832$ lb. For 256' (3.25 lb per linear foot)*<br>*This information is based on a pallet of stingers 9 1/2" x 1 3/6" x 16".  |
| <b>Packing Method:</b>   | Wood stickers are installed between the pallet and the products.<br>Wood stickers are installed every ten (10) rows to stabilize the load.<br>Every ordered item (sku) is separated by two (2) wooden blocks.<br>Two (2) nylon straps are fastened to each pallet.<br>Each pallet is covered in clear shrink wrap.  |

For any other specific manufacturing needs and/or requests that are not listed in this document, please contact your MenuiseroX representative.

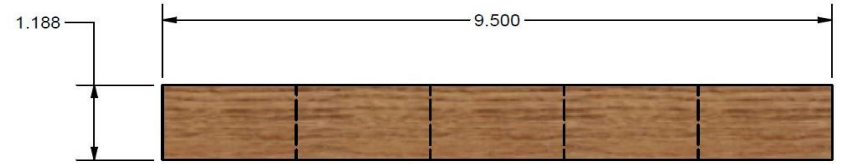